
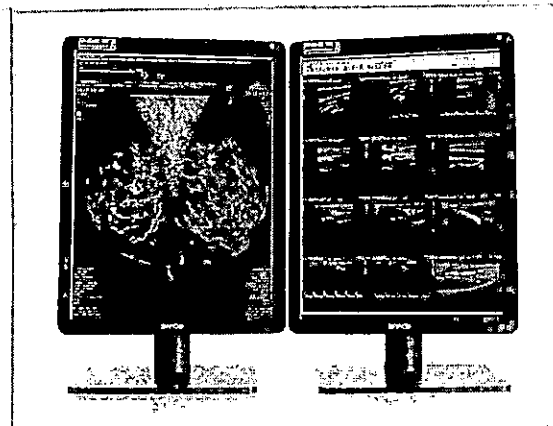


Nio Color 5MP (MDNC-6121)

5.8 MP high-bright color display

2.1

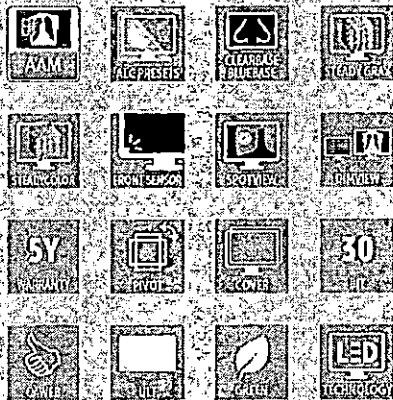

2.10-2

- Designed for radiology and mammography
- High-bright, steady colors and grays
- Front sensor and MediCal QAWeb for always-on compliance

Nio Color 5MP offers super bright, color calibrated and the most detailed medical images, including mammography and breast tomosynthesis. It's how we help you improve your workflow and make more confident diagnoses.

No detail goes unnoticed

Barco's Nio Color 5MP renders excellent color and grayscale images used in general radiology as well 2D and 3D mammography. Its high brightness (500 cd/m2) and high contrast ratio help you discern the most subtle image details for an accurate diagnosis. And the additional resolution allows you to fit more of the image on the screen for reduced panning and zooming

Using Barco's integrated front sensor, the Nio Color 5MP works perfectly together with Barco's online MediCal QAWeb solution for automated Quality Assurance and calibration. QAWeb guarantees stable DICOM grayscale images and, with SteadyColor, consistent calibrated color images throughout the display's lifetime.


Work smarter

With the integrated smart features, you can control and improve your productivity. SpotView™, for example, allows you to focus on an area of interest to unveil even more details. And with DimView™, auxiliary displays can be dimmed automatically so they don't interfere with your reading experience

The Nio Color 5MP is also an excellent solution for radiologists who want to angle their desktop. It lets you choose your preferred viewing angle and offers a highly ergonomic display configuration. It's also possible to switch between Clearbase and Bluebase viewing modes on-the-fly, whether to suit the image type or to change reading preferences. You decide which color you want, and



[Handwritten signature]

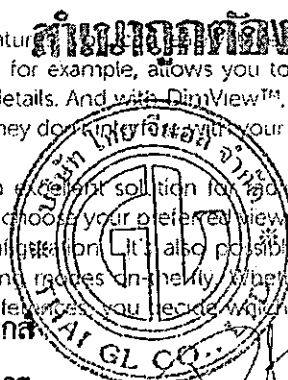

คณะกรรมการพิจารณาการประกวดราคาอิเล็กทรอนิกส์

๑.ลงชื่อ.....ประธานกรรมการ

๒.ลงชื่อ.....กรรมการ

๓.ลงชื่อ.....กรรมการ




PRODUCT SPECIFICATIONS	NIO COLOR 5MP (MDNC-6121)	2.1.10
Screen technology	LCD	2.1.10.1
Active screen size (diagonal)	541 mm (21.3")	2.1.10.2
Active screen size (H x V)	324.45 x 452.6 mm (12.77" x 17")	
Aspect Ratio (H:V)	3:4 for each display in portrait mode; 3:2 overall	2.1.10.3
Resolution	5.8 MP (2100 x 2800 pixels)	2.1.10.2
Pixel pitch	0.1545 mm	
Color imaging	Yes	
Gray imaging	Yes	
Bit depth	30 bit	2.1.10.4
Viewing angle (H; V)	178°	2.1.10.7
Uniformity correction	ULT	
SteadyColor	Yes, when used as system with MXRT display controller	
SteadyGray	Yes	
Ambient Light Compensation (ALC)	Yes	
Front sensor	Yes	
Maximum luminance	1000 cd/m ²	2.1.10.5
DICOM calibrated luminance	600 cd/m ²	2.1.10.6
Contrast ratio (panel typical)	1400:1	2.1.10.8
Response time ((Tr + T0)/2) (typical)	12.5 ms	
Housing color	RAL 9003 / RAL 9004	
Video input signals	DV-D Dual Link (2x) DisplayPort (2x)	
USB ports	1x USB 2.0 upstream (endpoint) 2x USB 2.0 downstream	
Power rating	24 VDC, 5 A 5 VDC, 0.1 A	
Power requirements	This device shall only be powered by the following medical approved power supplies: Adapter Technology, type CMD160-R240 Ratings marked on the medical power supply: ■ Input rating: 100-240 VAC, 1.9-0.8 A, 50/60 Hz ■ Output rating: 24 VDC, 6.3 A, 5 VDC, 0.5 A Efore (Real Electronics), type R-PS390A Ratings marked on the medical power supply: ■ Input rating: 100-240 VAC, 3.0 A, 50/60 Hz ■ Output rating: 24 VDC, 6.33 A, 5 VDC, 0.1 A	
Power consumption	60 W (nominal) < 0.5 W (standby)	
Dimensions with stand (W x H x D)	Portrait: 378 x 526-628 x 235 mm Landscape: 491 x 472-572 x 235 mm	
Dimensions w/o stand (W x H x D)	Portrait: 378 x 491 x 84 mm Landscape: 491 x 378 x 84 mm	
Dimensions packaged (W x H x D)	500 x 280 x 670 mm	
Net weight with stand	With protective cover: 11.6 kg Without protective cover: 10.2 kg	
Net weight w/o stand	With protective cover: 6.6 kg Without protective cover: 5.2 kg	



[Handwritten signature]

สำนักงานกึ่งกลาง



คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์


๑. ลงชื่อ..... ประธานกรรมการ

๒. ลงชื่อ..... กรรมการ

๓. ลงชื่อ..... กรรมการ

PRODUCT SPECIFICATIONS	NIO COLOR 5MP (MDNC-6121)
Net weight packaged	With protective cover: 17.0 kg (without optional accessories) Without protective cover: 15.7 kg (without optional accessories)
Tilt	-10° to +30°
Swivel	-45° to +45°
Pivot	90°
Height adjustment range	100 mm
Mounting standard	VESA (100 mm)
Screen protection	Protective, anti-reflective glass cover (optional)
Recommended modalities	AI, digital images including digital mammography
Certifications	FDA 510(k) K170476 for General Radiology CE0120 (MDD) 93/42/EEC: A3:2007/47/EC class I(b) product! CCC (China), KC (Korea), PSE (Japan), Inmetro (Brazil), B-S (India), EAC (Russia, Kazakhstan, Belarus, Armenia and Kyrgyzstan) Safety specific IEC 60950-1:2005 + A1:2009 EN 60950-1:2005 + A1:2010 + A11:2009 + A12:2011 + A2:2013 IEC 60601-1:2005 + A1:2012 EN 60601-1:2006 + A1:2013 + A12:2014 ANSI/AAMI ES 60601-1:2005 + R1:2012 CAN/CSA C22.2 No. 60601-1:14 EMI specific IEC 60601-1-2:2014 (ed.4) EN 60601-1-2:2015 (ed.4) FCC part 15 Class B CES-001 Level B VCCI Japan! Environmental China Energy Label, EU RoHS, China RoHS, REACH, Canada Health, WEEE, Packaging Directive
Supplied accessories	User guide Documentation disc System disc Video cable (1 x DisplayPort) Mains cables (UK, European (CEREC/KEHA), USA (UL/CSA adaptor plug NEMA515P), Chinese (CCC)) USB 2.0 cable External power supply
Optional accessories	Graphics board
QA software	MediCal QAWeb
Warranty	5 years, including 40000 hrs backlight warranty
Operating temperature	0 °C to 40 °C (15 °C to 35 °C with specs)
Storage temperature	-20 °C to 60 °C
Operating humidity	9% to 80% (non-condensing)
Storage humidity	5% to 95% (non-condensing)
Operating pressure	70 kPa minimum
Storage pressure	50 to 106 kPa

สำเนาถูกต้อง



[Handwritten signature]

คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑.ลงชื่อ.....ประธานกรรมการ

๒.ลงชื่อ.....กรรมการ

๓.ลงชื่อ.....กรรมการ



[Handwritten signature]

Last updated: 09 Jan 2019


Technical specifications are subject to change without prior notice. Please check www.barco.com for the latest information





Transform how you work.

DELL 24" MONITOR | P2419H

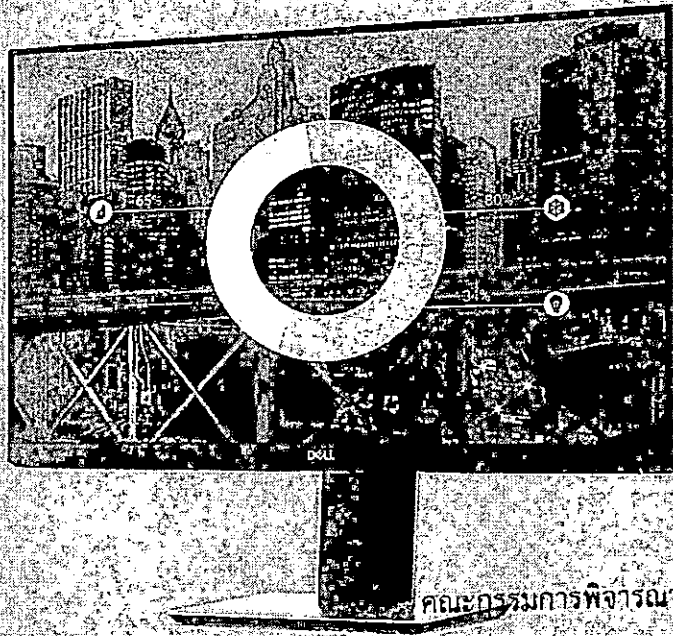

คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑.ลงชื่อ.....ประธานกรรมการ

๒.ลงชื่อ.....กรรมการ

๓.ลงชื่อ.....กรรมการ

สำนักงาน ก.ค.ช.

OPTIMIZE YOUR WORKSPACE

Get up valuable desk space with this 39.5" WLED monitor by making the smallest monitor the largest. Easily hide away cable clutter with the improved cable management design.

MAXIMIZE PRODUCTIVITY


The 3-sided ultrathin bezel delivers a seamless view across multiple monitors, while Easy Arrange in Dell Display Manager software helps you stay organized when multitasking.

WORK COMFORT AND ENHANCED RELIABILITY

Pivot, tilt, swivel and adjust the height of your monitor to your exact preference. Stay focused longer with a flicker-free screen and ComfortView that optimize eye comfort.

Dell monitors -- World's number one monitor brand. Stay on top of your game of mind with Dell Premium Panel Exchange, 3 year Advanced Exchange Service* and optional ProSupport.

Maximize productivity



OPTIMIZED WORKSPACE

More room to work: Free up valuable desk space with a thin monitor profile and the smallest monitor base in its class.¹

Clutter-free: Focus on your work while hiding away cable clutter with an improved cable management design.

Consistent and rich colors: A wide viewing angle enabled by In-Plane Switching technology lets you see vibrant colors—no matter where you sit.



MAXIMIZE PRODUCTIVITY

Expand your efficiency: The three-sided ultrathin bezel design lets you enjoy an uninterrupted view of your content across multiple monitors. And, with a Dell dual monitor set up, you can increase your productivity by up to 21%.⁵

More ways to multitask: Work conveniently across multiple screens and select from predefined templates with the Easy Arrange feature on Dell Display Manager software. Quickly tile and arrange your applications and get back to work faster with Auto-restore, a feature that remembers where you left off.



WORK COMFORTABLY.

Adjust to your comfort: Pivot, tilt, swivel and adjust the height of your monitor for a comfortable setup all day long. Or choose from a variety of mounts and stands, including VESA, for even more flexibility.

Easy on the eyes: This TÜV[®] Certified monitor has a flicker-free screen with ComfortView, a feature that reduces harmful blue light emissions. It's designed to optimize eye comfort even over extended viewing.



TRUSTED RELIABILITY

DELL MONITORS – WORLD'S NUMBER 1 MONITOR BRAND²

รับประกันคุณภาพ

Peace of mind: Dell Premium Panel Exchange allows a free panel replacement during the Limited Hardware Warranty⁷ per monitor only if one bright pixel is found.

Minimize downtime: Your monitor comes with a 3-year Advanced Exchange Service³ so that if a replacement becomes necessary, it will be shipped to you the next business day during your 3-year Limited Hardware Warranty.⁷

Get a higher level of support: Upgrade to 24x7, 11 regional Office phone support from qualified engineers with Dell ProSupport option.⁴

คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑.ลงชื่อ.....ประธานกรรมการ

๒.ลงชื่อ.....กรรมการ

๓.ลงชื่อ.....กรรมการ

Features & Technical Specifications

Monitor

Diagonal Viewing Size	Dell 24 Monitor - P2419H	
Active Display Area	60.45 cm (23.8 inches)	2.1.6
Height	527.04 mm (20.75")	
Width	296.46 mm (11.67")	
Maximum Preset Resolution	1920 x 1080 at 60 Hz	2.1.6
Aspect Ratio	16:9	
Pixel Pitch	0.275 mm x 0.275 mm	
Pixel Per Inch (PPI)	92	
Brightness	250 cd/m ² (typical)	
Color Support	Color Gamut (typical): 72% (CIE1931)* Color Depth: 16.7 Million colors	
Contrast Ratio	1000:1 (typical)	
Viewing Angle	178°/178°	
Response Time	8 ms (Normal); 5 ms (Fast) - (gray to gray)	
Panel Type	In-Plane Switching Technology	
Backlight Technology	LED EdgeLight System	2.1.6
ComfortView with Flicker-free screen	Yes	
Dell Display Manager Compatibility	Yes	
Remote Asset Management	Yes, via Dell Command Monitor	
Display Screen Coating	Antiglare with 3H hardness	

Connectivity

Connectors	1 x DisplayPort version 1.2, 1 x HDMI port version 1.4, 1 x VGA port, 1 x USB 3.0 upstream port (bottom), 2 x USB 3.0 downstream ports (side), 2 x USB 2.0 downstream ports (bottom)
Built-in Devices	USB 3.0 super-speed hub (with 1 x USB 3.0 upstream port), 2 x USB 3.0 downstream ports, 2 x USB 2.0 downstream ports

Design Features

Adjustability	Height-adjustable stand (130 mm), Tilt (-5° to 21°) Swivel (-45° to 45°), Pivot (-90° to 90°)
Security	Security lock slot (cable lock sold separately)
Flat Panel Mount Interface	VESA (100 mm x 100 mm)

Power

AC input voltage/frequency/current	100 VAC to 240 VAC / 50 Hz or 60 Hz ± 3 Hz / 1.5 A (typical)
Power Consumption (Operational)	18W (typical) / 42W (maximum)*
Power Consumption Stand by / Sleep	Less than 0.3W

Dimensions (with stand)

Height (Compressed ~ Extended)	356.1 mm ~ 486.1 mm (14.02" ~ 19.14")
Width	537.8 mm (21.27")
Depth	166.0 mm (6.54")

Weight (panel only - for VESA mount)	3.26 kg (7.19 lb)
Weight (with stand)	5.25 kg (11.57 lb)
Weight (with packaging)	7.10 kg (15.65 lb)

Standard Service Plan

Optional Service Plan

Environmental Compliance

Premium Panel Exchange, 3 Years Advanced Exchange Service* & Limited Hardware Warranty
Dell ProSupport†

ENERGY STAR®, EPEAT® registered where applicable*, RoHS Compliant, TCO-Certified Display, BFR/PVC free monitor (excluding external cables), Arsenic-Free glass and Mercury-Free for the panel only


What's in the box?

- Components**
 - Monitor with stand
- Cables**
 - DisplayPort cable
 - USB 3.0 upstream cable
 - Power cable
- Documentation**
 - Quick Setup Guide
 - Safety and regulatory information




คณะกรรมการพิจารณาผลการประกวดเลือกอิเล็กทรอนิกส์
 ๑.ลงชื่อ.....
 ๒.ลงชื่อ.....
 ๓.ลงชื่อ.....

[Handwritten signature]



SINGLE PHASE UPS

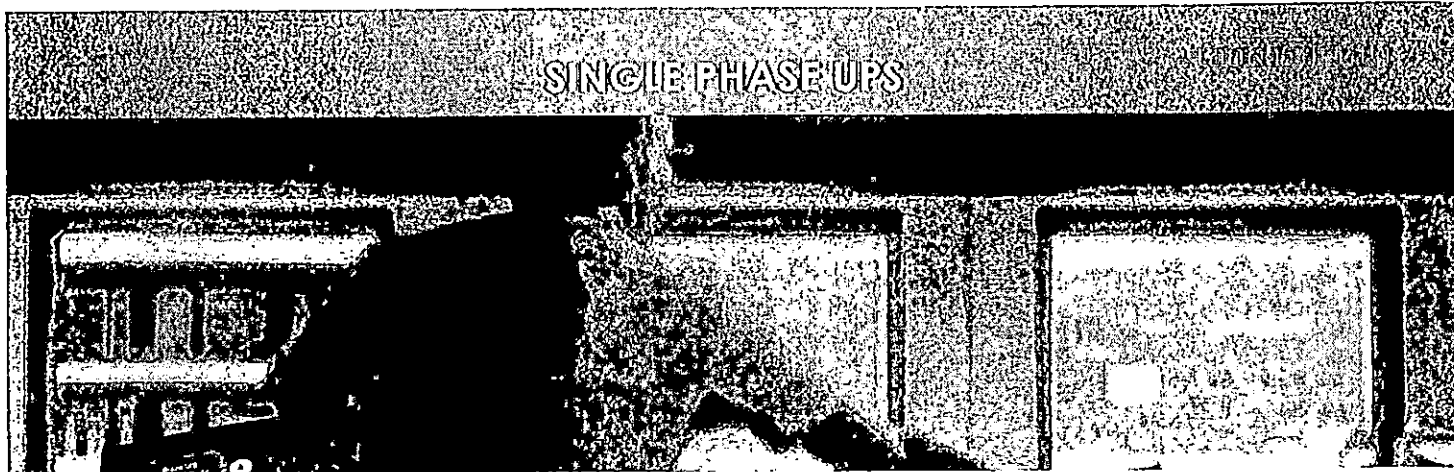


Challenger


1-3 KVA

Features


- High frequency and double conversion on-line technology
- Digitized microprocessor control optimizes reliability
- Wide input voltage range (110V - 300V)
- Input power factor correction
- Output power factor 0.9
- UPS start up without battery
- Cold start function
- Converter mode available
- ECO mode available
- Generator compatible
- Smart SNMP works with either USB or RS-232 together
- EPO function optional
- Input L and N reversed alarm function
- Optional extension battery pack
- Comprehensive display allows easy monitoring and access of UPS status
- OVCD optional
- Can add extra charger for long run (optional)
- Short circuit Protection
- Surge protection 480 Joules



Control Panel
Up to 50 Items set by LCD

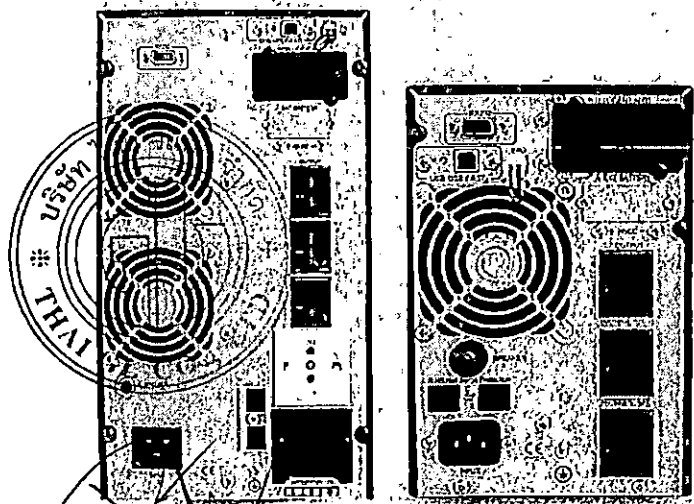

สำนักงานกรุงเทพ



คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑. ตั้งชื่อ.....ประธานกรรมการ (๐๖) 2-559-0866-8

๒. ตั้งชื่อ.....กรรมการ

๓. ตั้งชื่อ.....กรรมการ

SINGLE PHASE UPS

Challenger 1-3 KVA Specification 2.1.9

Model	SCC-1K/SCCH-1K	SCC-2K/SCCH-2K	SCC-3K/SCCH-3K
Capacity (VA/Watt)	1000VA/300W	2000VA/600W	3000VA/900W
Input			
Nominal Input Voltage	200/ 208/ 220/ 230/ 240Vac		
Input Voltage range	110 ~ 300Vac at 60% load , 160 ~ 300Vac at 100% load		
Input Frequency range	45 ~ 55Hz/55 ~ 65Hz		
Input Power factor	≥ 0.99 @Nominal voltage (100% load)		
Bypass			
Bypass Voltage	200/ 208/ 220/ 230/ 240Vac		
Transfer time	0ms Typical		
Output			
Output Voltage	200/ 208/ 220/ 230/ 240Vac		
Voltage regulation	± 1%		
Output Frequency	45 ~ 55Hz/56 ~ 64Hz		
Waveform	Pure Sine Wave		
Harmonic distortion (THDv)	≤ 3% (Linear load) ≤ 6% (Non-linear load)		
Efficiency	88%	89%	90%
Output Power Factor	0.9		
Battery			
Battery DC Voltage	24V	48V	84V
Battery Type	12V/9Ah	12V/9Ah	12V/9Ah
Battery number	2	4	6
Backup time	15-30 min Depend on Load		
Charge current	1.0 A		
Charging Voltage	27.4Vdc ± 1%	54.7Vdc ± 1%	82.1Vdc ± 1%
Typical recharge time	5 hours recover to 90% capacity		
System Features			
LCD Indicators	Load level, Battery level, AC mode, Battery mode, Bypass mode, and Fault indicators		
Alarm			
Battery Mode	Sounding every 4 seconds		
Low Battery	Sounding every second		
Fault	Continuously sounding		
Overload capacity	Sounding twice every second		
Communication Interface			
Smart RS-232/USB	Supports Windows® 2000/2003/XP/Vista/2008 Windows® 7/8 Linux,FreeBSD and MAC		
Optional SNMP	Power management from SNMP manager and web browser		
Physical			
Dimension (DxWxH)mm.	368 x 144 x 215	468 x 191 x 340	
Net Weight (Kgs)	10	21	26
Environmental			
Humidity Range	20 ~ 90% RH @ 0 ~ 40°C (Non-condensing)		
Noise level	≤ 55dB @ 1 Meter		
GL Standards			
Safety	IEC/EN 62040-1;IEC/EN60950-1		
EMC	IEC/EN 62040-2;IEC61000-4-2;IEC61000-4-3;IEC61000-4-4;IEC61000-4-5;IEC61000-6-6;IEC61000-4-3		
Design	IEC/EN 62040-3		





คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑. ลงชื่อ.....ประธานกรรมการ
 (๕๕) ๒-๕๕๑-๐๘๖๖-๘
 ๒. ลงชื่อ.....กรรมการ
 ๓. ลงชื่อ.....กรรมการ

OptiPlex 7070 Micro


OPTI PLEX 7070 MICRO / OPTI PLEX 7070 MICRO / OPTI PLEX 7070 MICRO

Intelligent desktop with versatile ultimate expandability and performance.

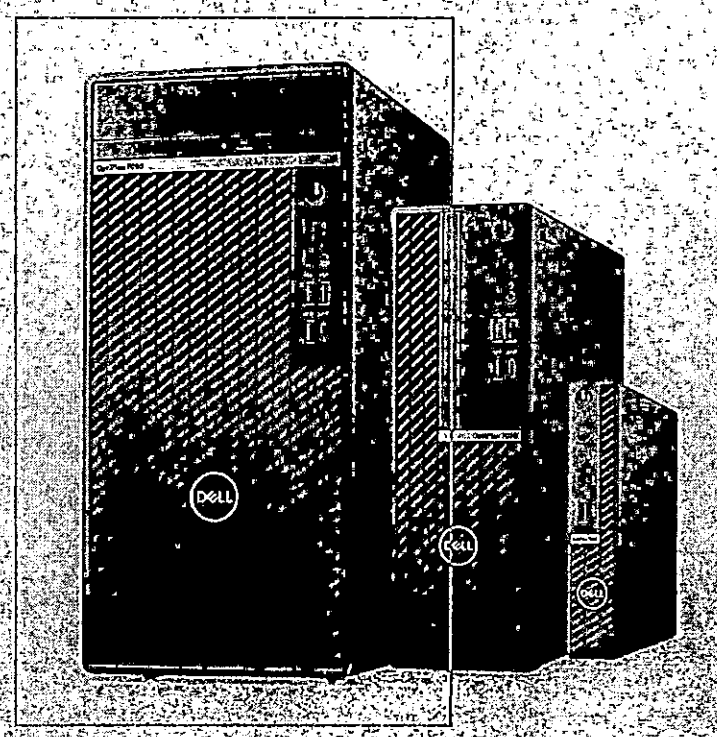

FASTER USER EXPERIENCES

Optimize the performance of your top 8 apps with the built-in artificial intelligence of the Optimizer Express Response. New ExpressConnect automatically joins the strongest access point and directs bandwidth to critical applications. Available with dual M.2 SSD option and USB Type-C 3.2 Gen 2x2 (40Gbps) provides 2x faster transfer speeds than USB 3.2 Gen 1. Experience smoother multitasking, powerful data streaming connectivity with integrated Intel Wi-Fi 6E (V790022) Max.



POWER THROUGH YOUR WORKDAY

The Intel Core™ i7™ processor, experience the most powerful desktop. The OptiPlex 7070 Micro features a 100W Intel Core™ i7™ processor (100W) with 500MHz DDR4 RAM to deliver up to 100W of power.

READY FOR



IMMERSIVE PRODUCTIVITY

Experience better tools for 3D rendering and 4K monitor use, even with the micro which supports discrete graphics. The new tower is optimized for content creation reality experiences. Designed to support high-end, ready for VR, 220W class graphics cards, including NVIDIA® GeForce® RTX™ 3090, this tower can take ground intensive work loads easy.



สำหรับเกมเมอร์ที่พร้อม

BUILT SMART

The Intel tower delivers more expandability, connectivity and performance. The OptiPlex 7070 Micro features a 100W Intel Core™ i7™ processor (100W) with 500MHz DDR4 RAM to deliver up to 100W of power.



คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

- ๑. ลงชื่อ.....ประธานกรรมการ
- ๒. ลงชื่อ.....กรรมการ
- ๓. ลงชื่อ.....กรรมการ

Recommended Accessories

OPTIPLEX 7090 TOWER, SMALL FORM FACTOR AND MICRO

CUSTOM STANDS AND MOUNTS




OPTIPLEX MICRO ALL-IN-ONE STAND

Small footprint mounting solution adapts to your environment, with cable management and monitor height adjustability, tilt, swivel and pivot functions.



OPTIPLEX MICRO ALL-IN-ONE MOUNT FOR DELL E SERIES MONITORS

This mount allows the Micro to be VESA mounted to select Dell E Series displays.



OPTIPLEX MICRO DUAL VESA MOUNT WITH ADAPTER BRACKET

Mount your system between two VESA compatible devices. Includes an adapter box to securely house the system's power adapter.




OPTIPLEX MICRO DVD+/-RW ENCLOSURE

Mount your system on a wall or under a surface with a VESA-compatible DVD+/-RW enclosure with full optical drive access. Includes an adapter box to securely house the system's power adapter.




OPTIPLEX MICRO VESA MOUNT WITH ADAPTER BRACKET

Mount your system on a wall or under a desk. Includes an adapter box to securely house the system's power adapter.



DELL SINGLE MONITOR ARM | MSA20

Minimize your footprint with this arm that offers easy installation and enhanced adjustability while keeping cables neatly hidden from view.



OPTIPLEX SMALL FORM FACTOR ALL-IN-ONE STAND

Small footprint mounting solution featuring integrated monitor power and Ethernet cables, as well as monitor adjustability with height, tilt, swivel and pivot functions.

PURPOSE-BUILT SOLUTIONS




DELL 27" MOUNT | U2720D

Secure and hold your 27" FHD monitor perfectly in place for a better viewing experience on your most important tasks.



DELL ULTRASHARP 24" MONITOR | U2422H

Take your work to new heights with this 23.8-inch FHD monitor with a wide color coverage. Features ComfortView. Plus an always-on multi-touch blue light screen, fast connectivity, and transfer speeds.




DELL PROFESSIONAL SOUND BAR | AE515M

Optimize conferencing calls and multi-media streaming with exceptional audio clarity. Minimize background noise while on calls with the dual mic array and echo cancellation feature.



DELL PREMIER MULTI-DEVICE WIRELESS KEYBOARD AND MOUSE | KM7321W 2.1.5

Multi-task seamlessly across 3 devices with this premium full-size keyboard and sculpted mouse combo with programmable shortcuts and 50 months battery life.

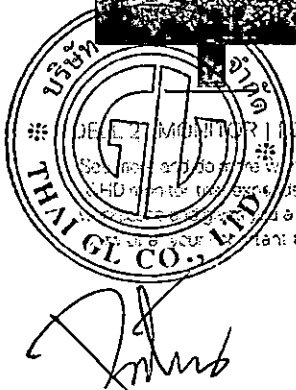

DELL WIRED MOUSE WITH FINGERPRINT READER | MS819

Wired mouse with fingerprint reader offers convenient and secure login and multi-launch with your passwords.



DELL PRO WIRED HI-ADAPT | WH15022

Experience exceptional audio clarity with this Texas certified wired headset that allows you to take calls on either side for a custom zed fit.



OPTIPLEX CABLE COVERS AND DUST FILTERS

Normally lost or torn out of your system, our custom dust filters safeguard internal components in factory, warehouse, and retail environments.

๑.ลงชื่อ..... ประธานกรรมการ

๒.ลงชื่อ..... กรรมการ

Features & Technical Specifications

OPTIPLEX 7090 TOWER, SMALL FORM FACTOR AND MICRO

Feature Processors¹

OptiPlex 7090 Technical Specifications¹

Tower:

- 10th Generation Intel® Core™ i5-10400, 12MB Cache, 6 Core, 12 Treads, 2.9GHz to 4.3GHz, 65W
- 10th Generation Intel® Core™ i5-10500, 12MB Cache, 6 Core, 12 Treads, 3.1GHz to 4.5GHz, 65W
- 10th Generation Intel® Core™ i5-10600, 12MB Cache, 6 Core, 12 Treads, 3.3GHz to 4.8GHz, 65W
- 10th Generation Intel® Core™ i7-10700, 16MB Cache, 8 Core, 16 Treads, 2.9GHz to 4.8GHz, 65W
- 10th Generation Intel® Core™ i9-10900, 20MB Cache, 10 Core, 20 Treads, 2.8GHz to 5.2GHz, 65W
- 10th Generation Intel® Core™ i3-10105, 6 MB Cache, 4 Core, 8 Threads, 3.7 GHz to 4.4 GHz, 65 W
- 10th Generation Intel® Core™ i3-10305, 8 MB Cache, 4 Core, 8 Threads, 3.8 GHz to 4.5 GHz, 65 W
- 10th Generation Intel® Core™ i5-10505, 12 MB Cache, 6 Core, 12 Threads, 3.2 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11400, 12 MB Cache, 6 Core, 12 Threads, 2.6 GHz to 4.4 GHz, 65 W
- 11th Generation Intel® Core™ i5-11500, 12 MB Cache, 6 Core, 12 Threads, 2.7 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11600, 12 MB Cache, 6 Core, 12 Threads, 2.8 GHz to 4.8 GHz, 65 W
- 11th Generation Intel® Core™ i7-11700, 16 MB Cache, 8 Core, 16 Threads, 2.5 GHz to 4.9 GHz, 65 W
- 11th Generation Intel® Core™ i9-11900, 16 MB Cache, 8 Core, 16 Threads, 2.5 GHz to 5.2 GHz, 65 W
- 11th Generation Intel® Core™ i7-11700K, 16 MB Cache, 8 Core, 16 Threads, 3.6 GHz to 5.0 GHz, 125 W
- 11th Generation Intel® Core™ i9-11900K, 16 MB Cache, 8 Core, 16 Threads, 3.5 GHz to 5.3 GHz, 125 W

2.1.1

Small Form Factor:

- 10th Generation Intel® Core™ i5-10400, 12MB Cache, 6 Core, 12 Treads, 2.9GHz to 4.3GHz, 65W
- 10th Generation Intel® Core™ i5-10500, 12MB Cache, 6 Core, 12 Treads, 3.1GHz to 4.5GHz, 65W
- 10th Generation Intel® Core™ i5-10600, 12MB Cache, 6 Core, 12 Treads, 3.3GHz to 4.8GHz, 65W
- 10th Generation Intel® Core™ i7-10700, 16MB Cache, 8 Core, 16 Treads, 2.9GHz to 4.8GHz, 65W
- 10th Generation Intel® Core™ i9-10900, 20MB Cache, 10 Core, 20 Treads, 2.8GHz to 5.2GHz, 65W
- 10th Generation Intel® Core™ i3-10105, 6 MB Cache, 4 Core, 8 Threads, 3.7 GHz to 4.4 GHz, 65 W
- 10th Generation Intel® Core™ i3-10305, 8 MB Cache, 4 Core, 8 Threads, 3.8 GHz to 4.5 GHz, 65 W
- 10th Generation Intel® Core™ i5-10505, 12 MB Cache, 6 Core, 12 Threads, 3.2 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11400, 12 MB Cache, 6 Core, 12 Threads, 2.6 GHz to 4.4 GHz, 65 W
- 11th Generation Intel® Core™ i5-11500, 12 MB Cache, 6 Core, 12 Threads, 2.7 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11600, 12 MB Cache, 6 Core, 12 Threads, 2.8 GHz to 4.8 GHz, 65 W
- 11th Generation Intel® Core™ i7-11700, 16 MB Cache, 8 Core, 16 Threads, 2.5 GHz to 4.9 GHz, 65 W
- 11th Generation Intel® Core™ i9-11900, 16 MB Cache, 8 Core, 16 Threads, 2.5 GHz to 5.2 GHz, 65 W

Micro:

- 10th Generation Intel® Core™ i5-10400T, 12MB Cache, 6 Core, 12 Treads, 2.0GHz to 3.6GHz, 35W
- 10th Generation Intel® Core™ i5-10400, 12MB Cache, 6 Core, 12 Treads, 2.9GHz to 4.3GHz, 65W
- 10th Generation Intel® Core™ i5-10500T, 12MB Cache, 6 Core, 12 Treads, 2.3GHz to 3.8GHz, 35W
- 10th Generation Intel® Core™ i5-10500, 12MB Cache, 6 Core, 12 Treads, 3.1GHz to 4.5GHz, 65W
- 10th Generation Intel® Core™ i5-10600T, 12MB Cache, 6 Core, 12 Treads, 2.4GHz to 4.0GHz, 35W
- 10th Generation Intel® Core™ i5-10600, 12MB Cache, 6 Core, 12 Treads, 3.3GHz to 4.8GHz, 65W
- 10th Generation Intel® Core™ i7-10700T, 16MB Cache, 8 Core, 16 Treads, 2.0GHz to 4.5GHz, 35W
- 10th Generation Intel® Core™ i7-10700, 16MB Cache, 8 Core, 16 Treads, 2.9GHz to 4.8GHz, 65W
- 11th Generation Intel® Core™ i9-10900T, 20MB Cache, 10 Core, 20 Treads, 1.9GHz to 4.6GHz, 35W
- 10th Generation Intel® Core™ i9-10900, 20MB Cache, 10 Core, 20 Treads, 2.8GHz to 5.2GHz, 65W
- 10th Generation Intel® Core™ i3-10105T, 6 MB Cache, 4 Core, 8 Threads, 3.0 GHz to 3.9 GHz, 35 W
- 10th Generation Intel® Core™ i3-10105, 6 MB Cache, 4 Core, 8 Threads, 3.7 GHz to 4.4 GHz, 65 W
- 10th Generation Intel® Core™ i3-10305T, 8 MB Cache, 4 Core, 8 Threads, 3.0 GHz to 4.0 GHz, 35 W
- 10th Generation Intel® Core™ i3-10305, 8 MB Cache, 4 Core, 8 Threads, 3.8 GHz to 4.5 GHz, 65 W
- 10th Generation Intel® Core™ i5-10505T, 12 MB Cache, 6 Core, 12 Threads, 3.2 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11400T, 12 MB Cache, 6 Core, 12 Threads, 1.3 GHz to 3.7 GHz, 35 W
- 11th Generation Intel® Core™ i5-11400, 12 MB Cache, 6 Core, 12 Threads, 2.6 GHz to 4.4 GHz, 65 W
- 11th Generation Intel® Core™ i5-11500T, 12 MB Cache, 6 Core, 12 Threads, 1.5 GHz to 3.9 GHz, 35 W
- 11th Generation Intel® Core™ i5-11500, 12 MB Cache, 6 Core, 12 Threads, 2.7 GHz to 4.6 GHz, 65 W
- 11th Generation Intel® Core™ i5-11600T, 12 MB Cache, 6 Core, 12 Threads, 1.7 GHz to 4.1 GHz, 35 W
- 11th Generation Intel® Core™ i5-11600, 12 MB Cache, 6 Core, 12 Threads, 2.8 GHz to 4.8 GHz, 65 W
- 11th Generation Intel® Core™ i7-11700T, 16 MB Cache, 8 Core, 16 Threads, 1.4 GHz to 4.6 GHz, 35 W
- 11th Generation Intel® Core™ i7-11700, 16 MB Cache, 8 Core, 16 Threads, 2.5 GHz to 4.9 GHz, 65 W
- 11th Generation Intel® Core™ i9-11900T, 16 MB Cache, 8 Core, 16 Thread



[Handwritten signature]

มีนามถูกต้อง



Chipset
Operating System
Options¹

- Intel® Q570 Chipset
- Windows 10 Home, 64-bit
- Windows 10 IoT Enterprise 2019 LTSC (OEM only)
- Windows 10 Pro, 64-bit
- Windows 10 Pro Education, 64-bit
- Kylin Linux Desktop version 10.1 (China only)
- Ubuntu® Linux® 20.04 LTS, 64-bit
- Windows 10 CMIT Government Edition 64-bit (China only)

2. ลงชื่อ.....กรรมการ
3. ลงชื่อ.....กรรมการ

[Handwritten signature]

Features & Technical Specifications

OPTIPLEX 7090 TOWER, SMALL FORM FACTOR AND MICRO


Feature	OptiPlex 7090 Technical Specifications ¹
Video Card ²	<p>Tower:</p> <ul style="list-style-type: none"> Intel® UHD 630 Graphics for 10th Generation Intel® Core™ i3/i5/i7/i9 processors Intel® UHD 730 Graphics for 11th Generation Intel® Core™ i5-11400 processors Intel® UHD 750 Graphics for 11th Generation Intel® Core™ i5/i7/i9 processors NVIDIA® GeForce® RTX 3070, 8 GB, GDDR6 (optional) NVIDIA® GeForce® GTX 1660 Super™, 6 GB, GDDR6 (optional) AMD Radeon™ RX640, 4 GB, GDDR5 (optional) AMD Radeon™ 550, 2GB, GDDR5 (optional) AMD Radeon™ 540, 1GB, GDDR5 (optional) <p>Small Form Factor:</p> <ul style="list-style-type: none"> Intel® UHD Graphics 630 for 10th Generation Intel® Core™ i3/i5/i7/i9 processors Intel® UHD Graphics 730 for 11th Generation Intel® Core™ i5-11400 processor Intel® UHD Graphics 750 for 11th Generation Intel® Core™ i5/i7/i9 processors AMD Radeon™ RX640, 4 GB, GDDR5 (optional) AMD Radeon™ 550, 2GB, GDDR5 (optional) AMD Radeon™ 540, 1GB, GDDR5 (optional)
Video Card ²	<p>Micro (Integrated):</p> <ul style="list-style-type: none"> Intel® UHD Graphics 630 with 10th Generation Intel® Core™ i3/i5/i7/i9 processors Intel® UHD Graphics 730/750 with 11th Generation Intel® Core™ i5/i7/i9 processors <p>Discrete:</p> <ul style="list-style-type: none"> AMD Radeon™ RX640, 4GB, GDDR5
Memory ^{2,3}	<p>Tower, Small Form Factor:</p> <ul style="list-style-type: none"> 4 GB, 1 x 4 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 8 GB, 1 x 8 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 8 GB, 2 x 4 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 16 GB, 1 x 16 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 16 GB, 2 x 8 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 16 GB, 4 x 4 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 32 GB, 1 x 32 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 32 GB, 2 x 16 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 32 GB, 4 x 8 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 64 GB, 2 x 32 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 64 GB, 4 x 16 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9, 3200 MHz for 11th Generation Intel® Core™ i5/i7/i9 processors 96 GB, 4 x 32 GB, DDR4, 2666 MHz for 10th Generation Intel® Core™ i5, 2933 MHz for 10th Generation Intel® Core™ i7/i9 and 11th Generation Intel® Core™ i5/i7/i9 processors <p>Note: Memory speed varies by different type of DPC (DIMM per Channel) installation.</p>

2.1.2



[Handwritten signature]

สำเนาถูกต้อง



[Handwritten signature]

แจ้งชื่อ.....

๑. ลงชื่อ.....ประธานกรรมการ

๒. ลงชื่อ.....กรรมการ

๓. ลงชื่อ.....กรรมการ

Features & Technical Specifications

OPTIPLEX 7090 TOWER, SMALL FORM FACTOR AND MICRO

Feature	OptiPlex 7090 Technical Specifications ¹
Wireless	Qualcomm QCA61X4A, 2x2, MIMO, 867 Mbps, 2.40 Ghz/5 GHz, Wi-Fi 5 (WiFi 802.11ac), Bluetooth 5.0 Qualcomm QCA9377, 1x1, 433 Mbps, 2.40 Ghz/5 GHz, Wi-Fi 5 (WiFi 802.11ac), Bluetooth 5.0 Intel® AX201, 2x2 MIMO, 2.40 Gbps, 2.40 Ghz/5 GHz, Wi-Fi 6 (WiFi 802.11ax), Bluetooth 5.1
Ports	<p>Tower:</p> <p>Front:</p> <ul style="list-style-type: none"> 1 USB 2.0 port with PowerShare 1 USB 3.2 Gen 2 Type-A port 1 USB 3.2 Gen 2x2 Type-C port (Gen 2x1 Type-C when configured with 10th Generation Intel processors) 1 USB 2.0 port 1 Universal Audio Jack <p>Rear:</p> <ul style="list-style-type: none"> 1 USB 3.2 Gen 2 Type-A port 2 USB 2.0 ports with Smart Power On 3 USB 3.2 Gen 1 Type-A ports 1 USB 3.2 Gen 2 Type-C* Alt-Mode (optional)
Ports	<p>Tower: Rear:</p> <ul style="list-style-type: none"> 1 RJ45 Ethernet port 2.1.4 1 re-tasking Line out/Line in audio port 2 DisplayPort 1.4 ports 1 VGA Port/DisplayPort 1.4 Port/HDMI 2.0b Port/ USB 3.2 Gen2 Type-C* Port with Alt-mode (optional) 1 Serial 2 PS/2 ports <p>Small Form Factor</p> <p>Front:</p> <ul style="list-style-type: none"> 1 USB 2.0 ports with PowerShare 1 USB 2.0 ports 1 USB 3.2 Gen 2 Type-A port 1 USB 3.2 Gen 2x2 Type-C port (Gen 2x1 Type-C when configured with 10th Generation Intel® processors) 1 universal audio port <p>Rear:</p> <ul style="list-style-type: none"> 3 USB 3.2 Gen 1 Type-A port 1 USB 3.2 Gen 2 Type-A port 2 USB 2.0 port with SmartPower On 2 PS/2 port 1 serial port 2 DisplayPort 1.4 ports 1 Re-tasking Line-out/Line-in audio port 1 RJ45 Ethernet port <p>Optional Modules:</p> <ul style="list-style-type: none"> 1 VGA port 1 HDMI 2.0b port 1 DisplayPort 1.4 port 1 USB 3.2 Gen 2 type C port with DisplayPort Alt Mode/Power delivery <p>Micro Integrated:</p> <p>Front:</p> <ul style="list-style-type: none"> 1 universal audio jack 1 re-tasking Line-in/Line out audio port 1 USB 3.2 Gen 2x2 Type-C port (Gen 2x1 Type-C when configured with 10th Generation Intel processors) 1 USB 3.2 Gen 2 Type-A port with PowerShare <p>Rear:</p> <ul style="list-style-type: none"> 1 RJ45 Ethernet port 1 Serial/Video port with Serial port/PS2 port/VGA port/DisplayPort 1.4 port/HDMI 2.0 Port/USB 3.2 Gen2 Type-C* Port with DP Alt-mode (optional) 1 USB 3.2 Gen 1 Type-A port 1 USB 3.2 Gen 1 Type-A port with Smart Power on 2 USB 3.2 Gen 2 Type-A ports 2 DisplayPort 1.4 ports <p>Micro Discrete: Rear</p> <ul style="list-style-type: none"> 1 RJ45 Ethernet port 2 Mini DisplayPort 1.4 ports 1 DisplayPort 1.4 Type-A port 1 USB 3.2 Gen 1 Type-A port with Smart Power on 2 USB 3.2 Gen 2 Type-A ports 2 DisplayPort 1.4 ports



สำเนาถูกต้อง



บริษัท ไทย จีแอล จำกัด
 โทร. 02-010-1111
 ๑. ลงชื่อ.....
 ๒. ลงชื่อ.....
 ๓. ลงชื่อ.....

Features & Technical Specifications

OPTIPLEX 7090 TOWER, SMALL FORM FACTOR AND MICRO

Feature	OptiPlex 7090 Technical Specifications ¹
Ports	Front 1 Universal audio jack 1 re-tasking Line-in/Line out audio port 1 USB 3.2 Gen 2x2 Type-C [®] port 1 USB 3.2 Gen 2 Type-A port with PowerShare
Optical Drive	Tower: 8x DVD-ROM 8x DVD+/-RW 2.1.7 Small Form Factor: 8x DVD+/-RW (Optional)
Slots	Tower: 1 SD-card slot (optional) 1 full-height Gen 4 PCIe x16 slot 1 full-height PCIe x16 (wired x4) slot 1 full-height PCI-32 slot 1 full-height PCIe x1 slot 1 M.2 2230 slot for Wi-Fi and Bluetooth card 1 M.2 2230/2280 slot for SSD/Intel Optane 1 M.2 2280 slot for SSD/Intel Optane 4 SATA slots for 2.5-inch HDD/SSD, and slim Optical Drive Small Form Factor: 1 half-height Gen 4 PCIe x16 slot 1 half-height Gen 3 PCIe x4 slot 1 M.2 2230 slot for Wi-Fi and Bluetooth card 1 M.2 2230/2280 slot for solid-state drive/Intel Optane 1 M.2 2280 slot for solid-state drive/Intel Optane 3 SATA 3.0 slot for 3.5/2.5-inch hard drive/slim optical drive 1 SD 4.0 card slot Micro: 1 M.2 2230 slot for Wi-Fi and Bluetooth card 1 M.2 2230/2280 slot for SSD/Intel Optane 1 M.2 2280 slot for SSD/Intel Optane 1 SATA slot for 2.5-inch hard drive 1 Kensington cable-lock slot

Note: The DIGFX SKU does not support SATA slot.

Primary Hard Drive ^{2,3}	Tower:
	2.5-inch, 1 TB, 5400 RPM, SATA, HDD
	2.5-inch, 2 TB, 5400 RPM, SATA, HDD
	2.5-inch, 500 GB, 7200 RPM, SATA, HDD
	2.5-inch, 1 TB, 7200 RPM, SATA, HDD
	2.5-inch, 500 GB, 7200 RPM, SATA, HDD, Self-Encrypting, Opal 2.0, FIPS
	3.5-inch, 500 GB, 7200 RPM, SATA, HDD
	3.5-inch, 1 TB, 7200 RPM, SATA, HDD 2.1.3
	3.5-inch, 2 TB, 7200 RPM, SATA, HDD
	3.5-inch, 4 TB, 5400 RPM, SATA, HDD
	M.2 2230, 128 GB, PCIe NVMe Gen3 x4, Class 35 SSD
	M.2 2230, 256 GB, PCIe NVMe Gen3 x4, Class 35 SSD
	M.2 2230, 512 GB, PCIe NVMe Gen3 x4, Class 35 SSD
	M.2 2280, 256 GB, PCIe NVMe Gen3 x4, Class 40 SSD
	M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD
	M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD
	M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD
	M.2 2280, 256 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive
	M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive
	M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive
	Small Form Factor: 2.5-inch, 1 TB, 5400 RPM, SATA, HDD 2.5-inch, 2 TB, 5400 RPM, SATA, HDD 2.5-inch, 500 GB, 7200 RPM, SATA, HDD 2.5-inch, 1 TB, 7400 RPM, SATA, HDD 2.5-inch, 500 GB, 7200 RPM, SATA, HDD, Self-Encrypting, Opal 2.0, FIPS 3.5-inch, 500 GB, 7200 RPM, SATA, HDD 3.5-inch, 1 TB, 7200 RPM, SATA, HDD 3.5-inch, 2 TB, 7200 RPM, SATA, HDD 3.5-inch, 4 TB, 5400 RPM, SATA, HDD



ตำแหน่งกึ่งกลาง



๑. ลงชื่อ..... ประธานกรรมการ
 ๒. ลงชื่อ..... กรรมการ
 ๓. ลงชื่อ..... กรรมการ

Certificate No : 20150522-2-0006



CERTIFICATE OF TRAINING

This is to certify that

Mr. Tongchai Ekkarak


completed a course of instruction on the

INFINITT Healthcare

Basic Engineering



2015 1st Partner Training
May 22nd, 2015



ตำแหน่งผู้ฝึกอบรม

คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์

๑. ลงชื่อ.....

๒. ลงชื่อ.....

๓. ลงชื่อ.....



Sung Min, Park

Sung Min, Park
Executive Director

Overseas Business Division

INFINITT Healthcare

๑.๒๖.
Date: 1st FEB. 2022

Letter of Authorization

To whom it may concern:

We hereby authorize the following entity: **THAI GL Co., Ltd.** with registered address at:
388 Muban Town-in-Town, Soi Ladphrao 94, Ladphrao Road, Plab-Pla,
Wangthonglang, Bangkok 10310, Thailand, to be our system integrator partner, with the
preferable right to sell our products listed herein within the authorized territory below.

Authorized Territory:

Country of Thailand

Products:

Barco Healthcare medical display products, including but not limited to NIO, CORONIS,
THAI GL Co., Ltd. accessories products.



This authorization is effective on the date above and expires on 31st Dec 2023, unless
earlier revoked by BARCO in writing.

๒.๑.

ตำแหน่งที่พิมพ์



Ellie, Lo Hung-Chun
Senior Business Development Manager
Healthcare Div, South East Asia

คณะกรรมการพิจารณาผลการประกาศราคาอิเล็กทรอนิกส์

- ๑. ลงชื่อ.....กรรมการ
- ๒. ลงชื่อ.....กรรมการ
- ๓. ลงชื่อ.....กรรมการ





THAI GL CO., LTD.

บริษัท ไทย จีแอล จำกัด

วันที่ ๒ พฤศจิกายน ๒๕๖๕

เรื่อง ขอรับรองคุณภาพการใช้งานและการรับประกัน
 เรียบน ประธานคณะกรรมการประกวดราคาซื้อ

ตามที่ จังหวัดนครปฐม ได้มีความประสงค์จะประกวดราคาซื้อด้วยวิธีประกวดราคาอิเล็กทรอนิกส์ (e-bidding) การซื้อชุดจอภาพสำหรับรังสีแพทย์แปลผลภาพ ๕ ล้านพิกเซล จำนวน ๒ ชุด ตามประกาศ จังหวัดนครปฐม เลขที่ ๕/๒๕๖๖ ลงวันที่ ๒๐ ตุลาคม ๒๕๖๕ นั้น

บริษัท ไทย จีแอล จำกัด ผู้นำทางด้านผู้แทนจำหน่ายครุภัณฑ์ทางการแพทย์ดังกล่าว มีความจำนงขอรับรองคุณภาพการใช้งาน และการรับประกันครุภัณฑ์ทางการแพทย์ดังกล่าว ตามรายละเอียดต่อไปนี้

๑. อ้างอิงข้อ ๒.๑.๔ ต้องมี Ethernet Port แบบ ๑๐/๑๐๐/๑๐๐๐ Mbps หรือดีกว่า
๒. อ้างอิงข้อ ๓. เงื่อนไขเฉพาะ

- ๓.๑. ผู้ขายต้องรับรองว่าเป็นของใหม่ไม่เคยใช้งานมาก่อน
- ๓.๒. ผู้ขายต้องรับประกันคุณภาพเครื่องและบริการเป็นเวลา ๒ ปี นับจากวันส่งมอบของครบเป็นต้นไปนับตั้งแต่วันที่ผู้ซื้อได้รับมอบ โดยภายในกำหนดเวลาดังกล่าว หากสิ่งของตามกำหนดสัญญาเสื่อมหรือชำรุดเนื่องจากการใช้งานตามปกติ ผู้ขายจะต้องซ่อมแซมให้อยู่ในสภาพปกติดังเดิม ภายใน ๗ วัน นับแต่วันที่ได้รับแจ้งจากผู้ซื้อโดยไม่คิดค่าใช้จ่ายใดๆ ทั้งสิ้นและมีเครื่องที่สามารถใช้งานได้ดีมาใช้ในการระหว่างรอซ่อม หากมีการแก้ไข ๓ ครั้งแล้วยังไม่สามารถใช้งานได้ตามปกติ ผู้ขายจะต้องนำเครื่องมาเปลี่ยนให้ใหม่โดยไม่คิดมูลค่า
- ๓.๓. มีคู่มือการซ่อมและบำรุงรักษาเครื่อง (Service & Technical manual)
- ๓.๔. ผู้ขายต้องติดตั้งโปรแกรมคุณภาพ PACS ที่ทางโรงพยาบาลใช้งานอยู่โดยช่างผู้ชำนาญที่ได้การอบรมและมีใบรับรองจากทางบริษัทผู้ผลิต
- ๓.๕. ผู้ขายต้องทำการติดตั้งพร้อมเซอร์ฟแวร์ระบบจัดเก็บและรับส่งภาพทางการแพทย์ระบบดิจิทัลที่ทางโรงพยาบาลใช้งานอยู่
- ๓.๖. ผู้ขายต้องได้รับการแต่งตั้งให้เป็นตัวแทนจำหน่ายโดยได้รับการแต่งตั้งโดยตรงจากโรงงานผู้ผลิตในต่างประเทศ
- ๓.๗. ผู้ขายจะต้องทำการฝึกอบรมการใช้งานเครื่องมือให้เจ้าหน้าที่ของโรงพยาบาลจนสามารถคณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์ใช้งานได้

๑.ลงชื่อ.....^ศ.....ประธานกรรมการ
 ๒.ลงชื่อ.....^ศ.....กรรมการ
 ๓.ลงชื่อ.....^ศ.....กรรมการ





THAI GL CO., LTD.

บริษัท ไทย จีแอล จำกัด

ทางบริษัทฯ หวังเป็นอย่างยิ่งว่าจะได้รับความอนุเคราะห์เป็นอย่างดีจากทาง จังหวัดนครปฐม และขอขอบพระคุณ
เป็นอย่างสูงล่วงหน้ามา ณ โอกาสนี้



ขอแสดงความนับถือ

(นายสิทธิธา แสงทองสมานติน)

Area Sales Manager



- คณะกรรมการพิจารณาผลการประกวดราคาอิเล็กทรอนิกส์
- ๑. ลงชื่อ.....^{ks}.....ประธานกรรมการ
 - ๒. ลงชื่อ.....^{X #}.....กรรมการ
 - ๓. ลงชื่อ.....^{on}.....กรรมการ



รายการเดินบัญชีเงินฝากกระแสรายวัน
STATEMENT OF CURRENT ACCOUNT
往来账户对账单

ธนาคารไทยพาณิชย์
ธนาคาร (สาขา) กรุงเทพ



หน้าที 1/8 (609)

ชื่อ บจก. ไทย จีนแอล
ที่อยู่ 388 ม.บ. ทาวเวอร์อินทาวน์ ถ.ลาดพร้าว ต.พลับพลา
อ.วังทองหลาง จ.กทม. 10310

สาขาศรีวิภา ทาวน์อินทาวน์
เลขที่บัญชีเงินฝาก 609-1-00373-0

เพื่อบอกสำเนาในการทำสัญญาซื้อขาย / สัญญาเช่า / สัญญาเช่าที่ดิน / สัญญาเช่าอาคาร / สัญญาเช่าที่ดิน
และลงนามในเอกสารที่เกี่ยวข้องกับการทำสัญญา



สำเนาถูกต้อง

